




FRONIUS PRIMO GEN24 3.0 / GEN24 3.0 PLUS EFFICIENCY CURVE

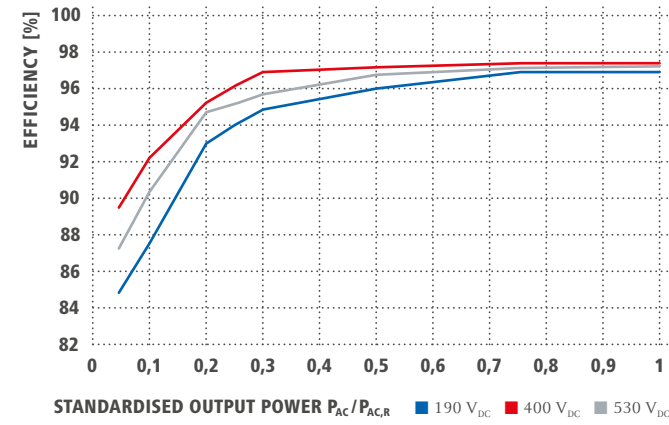


FRONIUS PRIMO GEN24 5.0 / GEN24 5.0 PLUS EFFICIENCY CURVE

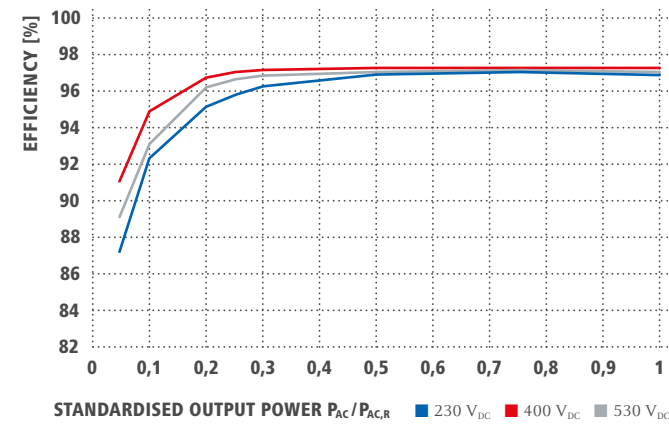


FRONIUS PRIMO GEN24 6.0 / GEN24 6.0 PLUS EFFICIENCY CURVE

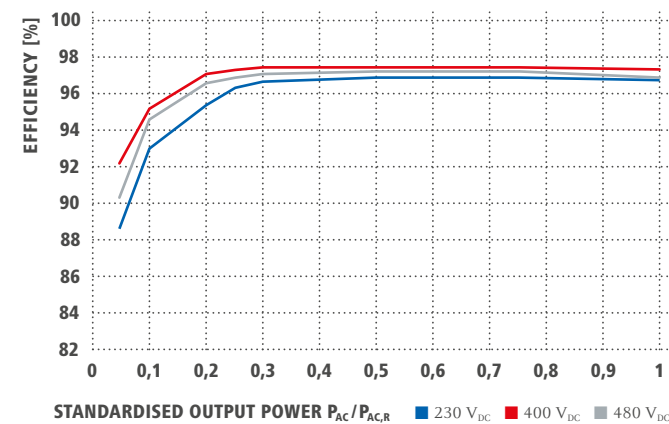


FRONIUS PRIMO GEN24 3.0 / GEN24 3.0 PLUS TEMPERATURE DERATING

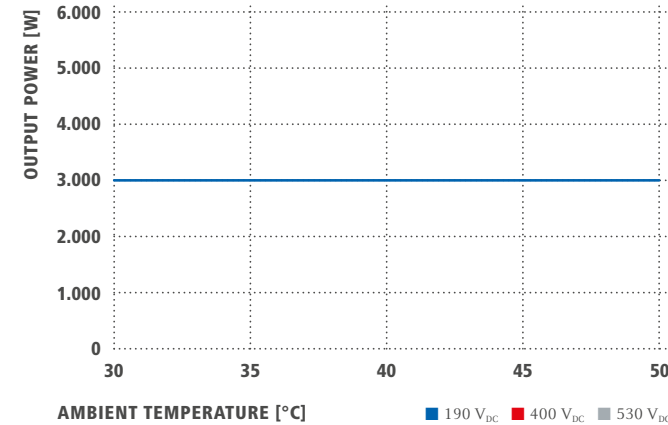

FRONIUS PRIMO GEN24 5.0 / GEN24 5.0 PLUS TEMPERATURE DERATING

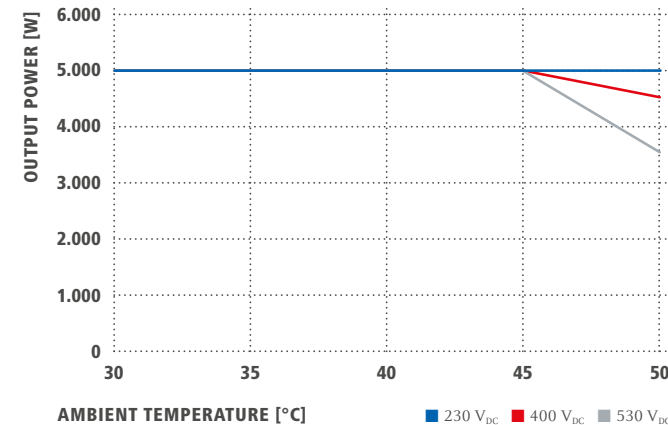

FRONIUS PRIMO GEN24 6.0 / GEN24 6.0 PLUS TEMPERATURE DERATING

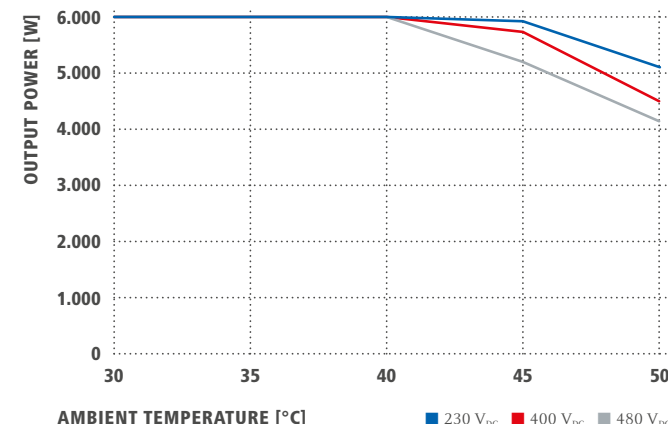

THREE BUSINESS UNITS, ONE GOAL: TO SET THE STANDARD THROUGH TECHNOLOGICAL ADVANCEMENT.

What began in 1945 as a one-man operation now sets technological standards in the fields of welding technology, photovoltaics and battery charging. Today, the company has around 5,440 employees worldwide and 1,264 patents for product development show the innovative spirit within the company. Sustainable development means for us to implement environmentally relevant and social aspects equally with economic factors. Our goal has remained constant throughout: to be the innovation leader.

PERFECT WELDING

Our mission is Perfect Welding; a task we have approached with passion and skill for decades in order that our customers can join materials with the perfect weld seam. With our outstanding technologies and services and together with our customer's applications, not only do we solve their specific welding technology problems, but we also make a substantial contribution to increasing their productivity.

SOLAR ENERGY

Our mission is to achieve 24 hours of sun. Day after day we are hard at work turning this vision of a future in which 100% of the world's energy needs are covered by renewable sources into a reality. We are therefore concentrating on solutions to intelligently, efficiently and economically generate, store, distribute and consume solar energy.

PERFECT CHARGING

As know-how leaders in the world of battery charging, we deliver exceptional solutions to create the maximum benefit for our customers. For the intralogistics sector, we are committed to energy flow optimisation for electric forklift trucks and are constantly striving for the next innovation. Our powerful charging systems for vehicle workshops guarantee safe and reliable processes.

Further information about all Fronius products and our global sales partners and representatives can be found at www.fronius.com

FRONIUS PRIMO GEN24 PLUS

The hybrid allrounder with individual backup power

Fronius India Private Limited
Plot no BG-71/2/B,
Pimpri Industrial Area,
MIDC- Bhosari,
Pune- 411026, India
pv-sales-india@fronius.com
www.fronius.in

Fronius Australia Pty Ltd.
90-92 Lambeck Drive
Tullamarine VIC 3043
Australia
pv-sales-australia@fronius.com
www.fronius.com.au

Fronius UK Limited
Maidstone Road, Kingston
Milton Keynes, MK10 0BD
United Kingdom
pv-sales-uk@fronius.com
www.fronius.co.uk

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
pv-sales@fronius.com
www.fronius.com


M2.00.0004.EN v12.März.2021 as17

/ Perfect Welding / Solar Energy / Perfect Charging



FRONIUS PRIMO GEN24 & GEN24 PLUS

Maximum flexibility and future reliability with the uniquely versatile inverter

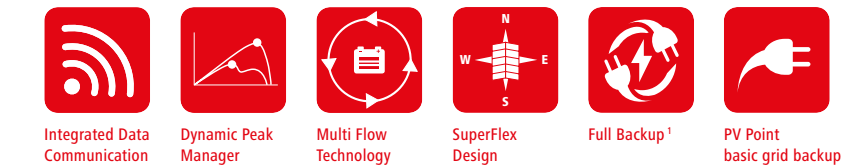

The one-phase Primo GEN24 product family consists of the Primo GEN24 inverters and the Primo GEN24 Plus hybrid inverters. With power classes ranging from 3.0 to 6.0 kw, they are the perfect solution for private households. With numerous features, these one-phase devices meet all customer needs – from energy management to WLAN connection as standard, Ethernet connectivity and easy integration of third-party components.

The Fronius Primo GEN24 Plus guarantees the highest level of safety in case of power grid failure: PV Point or even Full Backup. The Full Backup feature works in combination with a battery and supplies loads like an electric cooker or a heat pump, whenever there is sufficient energy available.



Fronius UP¹⁾

The Primo GEN24 is also available as an inverter without hybrid functions but still with an integrated basic backup power supply (PV Point). With the Fronius Upgrade Programme the battery connection and Full Backup feature can easily be activated. A software update with Fronius Solar.web (carried out by the installer) turns the Primo GEN24 to a Primo GEN24 Plus. This leads to maximal flexibility and future reliability because the battery connection and backup function can be upgraded at any time.

TECHNICAL DATA FRONIUS PRIMO GEN24 AND GEN24 PLUS (3.0, 3.6, 4.0)

INPUT DATA	PRIMO GEN24 3.0 / GEN24 3.0 PLUS	PRIMO GEN24 3.6 / GEN24 3.6 PLUS	PRIMO GEN24 4.0 / GEN24 4.0 PLUS
Number of MPP trackers	2		
Max. input current (I _{dc max} MPPT1 / MPPT2)	22 A / 12 A		
Max. array short circuit current (MPPT1 / MPPT2)	33 A / 18 A		
DC input voltage range (U _{dc min} - U _{dc max})	65 V - 600 V		
Nominal input voltage (U _{dc,n})	400 V		
Feed-in start voltage (U _{dc start})	80 V		
Usable MPP voltage range	65 V - 530 V		
Number of DC connections (MPPT1 / MPPT2)	2 / 2		
Max. PV generator output	4.5 kW _{peak}	5.5 kW _{peak}	6.0 kW _{peak}

OUTPUT DATA	PRIMO GEN24 3.0 / GEN24 3.0 PLUS	PRIMO GEN24 3.6 / GEN24 3.6 PLUS	PRIMO GEN24 4.0 / GEN24 4.0 PLUS
AC nominal output (P _{ac,r})	3,000 W	3,680 W	4,000 W
Max. output power	3,000 VA	3,680 VA	4,000 VA
Max. output current (I _{ac max})	19.40 A	23.70 A	25.80 A
Grid connection (voltage range)	1-NPE 220 V / 230 V (+20% / -30%)		
Frequency (frequency range)	50 Hz / 60 Hz (45 Hz - 65 Hz)		
Total harmonic distortion	< 2 %		
Power factor (cos φ _{ac,r})	0.8 - 1 ind. / cap.		
Backup power	1-NPE 220 V / 230 V		

¹⁾ The Full Backup Option is available for the Primo GEN24 3.0 - 6.0 Plus. For the Full Backup, additional external components for grid separation are required. You can find more information on this in the operating instructions.

²⁾ Please note that the availability of Fronius UP differs from country to country. You can find an overview of the various availabilities on www.fronius.com.

TECHNICAL DATA FRONIUS PRIMO GEN24 AND GEN24 PLUS (3.0, 3.6, 4.0)

OUTPUT DATA PV POINT	PRIMO GEN24 3.0 / GEN24 3.0 PLUS	PRIMO GEN24 3.6 / GEN24 3.6 PLUS	PRIMO GEN24 4.0 / GEN24 4.0 PLUS
Nom. output power PV Point	3,000 VA	3,000 VA	3,000 VA
Grid connection (voltage range) PV Point		1 – NPE 220 V / 230 V	
Switchover time		< 90 seconds	

OUTPUT DATA FULL BACKUP ¹	PRIMO GEN24 3.0 PLUS	PRIMO GEN24 3.6 PLUS	PRIMO GEN24 4.0 PLUS
Nom. output power Full Backup	3,000 VA	3,600 VA	4,000 VA
Grid connection (voltage range) Full Backup		1 – NPE 220 V / 230 V	
Switchover time		< 90 seconds	

FOR THE FULL BACKUP FUNCTION A GEN24 PLUS IS NEEDED.

¹⁾ The Full Backup Option is available for the Primo GEN24 3.0 - 6.0 Plus. For the Full Backup, additional external components for grid separation are required. You can find more information on this in the operating instructions.

BATTERY CONNECTION	PRIMO GEN24 3.0 PLUS	PRIMO GEN24 3.6 PLUS	PRIMO GEN24 4.0 PLUS
Number of DC connections		1	
Max. input current (I _{dc max})		22 A	
DC input voltage range (U _{dc min} - U _{dc max})		150 V - 455 V	
DC battery connection technology		1x BATT+ and 1x BATT- push-in spring terminals 2.5 - 10 mm ²	
Max. input / output power ²⁾	3,110 W	3,810 W	4,140 W
Max. AC charging power	3,000 W	3,680 W	4,000 W
Compatible batteries		BYD Battery-Box Premium HVS/HVM ³⁾	

FOR THE BATTERY CONNECTION A GEN24 PLUS IS NEEDED

²⁾ Depending on the connected battery

³⁾ Except HVS 10.2, HVS 12.8, HVM 8.3 and HVM 22.1

GENERAL DATA	PRIMO GEN24 3.0 / GEN24 3.0 PLUS	PRIMO GEN24 3.6 / GEN24 3.6 PLUS	PRIMO GEN24 4.0 / GEN24 4.0 PLUS
Dimensions (height x width x depth)		530 x 474 x 165 mm	
Weight (inverter / with packaging)		15.4 / 19 kg	
Degree of protection		IP 66	
Protection class		1	
Nighttime power loss		< 10 W	
Overvoltage category (DC/AC) ⁴⁾		2 / 3	
Inverter design		Transformerless	
Cooling		Regulated air cooling	
Installation		Indoor and outdoor installation	
Ambient temperature range		-40 - +60 °C	
Permitted humidity		0 - 100 %	
Noise Emission		< 42 dB (A)	
Max. altitude		4,000 m	
DC PV connection technology		4x DC+ and 4x DC- push-in spring terminals 2.5 - 10 mm ²	
AC connection technology		3 pole AC push-in spring terminals 2.5 - 10 mm ² 3 pole backup power push-in spring terminals 1.5mm ² - 10mm ² 2x PE screw terminals 2.5 - 16 mm ² and 3x 2.5 – 10mm ²	
Certificates and compliance with standards		IEC 62109, IEC 62909, AS/NZS 4777.2, CEI 0-21, ABNT BNR 16149 and 16150, IEC 62116, IEC 61727 ⁵⁾	
Backup power functions		PV Point or Full Backup	

EFFICIENCY	PRIMO GEN24 3.0 / GEN24 3.0 PLUS	PRIMO GEN24 3.6 / GEN24 3.6 PLUS	PRIMO GEN24 4.0 / GEN24 4.0 PLUS
Max. efficiency		97.6 %	
Europ. efficiency (ηEU)	96.8 %	97.0 %	97.1 %
MPP-tracking efficiency		> 99.9 %	

PROTECTIVE DEVICES	PRIMO GEN24 3.0 / GEN24 3.0 PLUS	PRIMO GEN24 3.6 / GEN24 3.6 PLUS	PRIMO GEN24 4.0 / GEN24 4.0 PLUS
DC insulation measurement		Yes	
Overload behaviour		Operating point shift. Power limitation	
DC disconnect		Yes	
Reverse polarity protection		Yes	

INTERFACES	PRIMO GEN24 3.0 / GEN24 3.0 PLUS	PRIMO GEN24 3.6 / GEN24 3.6 PLUS	PRIMO GEN24 4.0 / GEN24 4.0 PLUS
WLAN / 2x Ethernet LAN		Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)	
6x digital in/out + 6x digital in		Interface to ripple control receiver, energy management	
USB 2.0 (A-socket)		1 A supply	
Emergency stop (WSD)		Yes	
Datalogger and Webserver		Included	
2x RS485		Modbus RTU SunSpec (third-party supplier) / Fronius Smart Meter, battery (GEN24 Plus), Fronius Ohmpilot	

⁴⁾ According to IEC 62109-1. Optional retrofit surge protection device DC SPD type 1+2 for 2 MPP trackers available under the following article number: 4,240,313,CK

⁵⁾ For the current certificates, please see www.fronius.com/primo-gen24-plus-cert

For further information on the availability of this inverter in your country please see www.fronius.com.

TECHNICAL DATA FRONIUS PRIMO GEN24 AND GEN24 PLUS (4.6, 5.0, 6.0)

INPUT DATA	PRIMO GEN24 4.6 / GEN24 4.6 PLUS	PRIMO GEN24 5.0 / GEN24 5.0 PLUS	PRIMO GEN24 6.0 / GEN24 6.0 PLUS
Number of MPP trackers		2	
Max. input current (I _{dc max} MPPT1 / MPPT2)		22 A / 12 A	
Max. array short circuit current (MPPT1 / MPPT2)		33 A / 18 A	
DC input voltage range (U _{dc min} - U _{dc max})		65 V - 600 V	
Nominal input voltage (U _{dc,n})		400 V	
Feed-in start voltage (U _{dc start})		80 V	
Usable MPP voltage range		65 V - 530 V	65 V - 480 V
Number of DC connections (MPPT1 / MPPT2)		2 / 2	
Max. PV generator output	6.9 kW _{peak}	7.5 kW _{peak}	9.0 kW _{peak}

OUTPUT DATA	PRIMO GEN24 4.6 / GEN24 4.6 PLUS	PRIMO GEN24 5.0 / GEN24 5.0 PLUS	PRIMO GEN24 6.0 / GEN24 6.0 PLUS
AC nominal output (P _{ac,n})	4,600 W	5,000 W	6,000 W
Max. output power	4,600 VA	5,000 VA	6,000 VA
Max. output current (I _{ac max})	27.50 A	27.50 A	27.50 A
Grid connection (voltage range)		1–NPE 220 V / 230 V (+ 20 % / - 30 %)	
Frequency (frequency range)		50 Hz / 60 Hz (45 Hz – 65 Hz)	
Total harmonic distortion		< 2 %	
Power factor (cos φ _{ac,r})		0,8 - 1 ind. / cap.	
Backup power		1–NPE 220 V / 230 V	

OUTPUT DATA PV POINT	PRIMO GEN24 4.6 / GEN24 4.6 PLUS	PRIMO GEN24 5.0 / GEN24 5.0 PLUS	PRIMO GEN24 6.0 / GEN24 6.0 PLUS
Nom. output power PV Point	3,000 VA	3,000 VA	3,000 VA
Grid connection (voltage range) PV Point		1 – NPE 220 V / 230 V	
Switchover time		< 90 seconds	

OUTPUT DATA FULL BACKUP ¹	PRIMO GEN24 4.6 PLUS	PRIMO GEN24 5.0 PLUS	PRIMO GEN24 6.0 PLUS
Nom. output power Full Backup	4,600 VA	5,000 VA	6,000 VA
Grid connection (voltage range) Full Backup		1 – NPE 220 V / 230 V	
Switchover time		< 90 seconds	

FOR THE FULL BACKUP FUNCTION A GEN24 PLUS IS NEEDED

¹⁾ The Full Backup Option is available for the Primo GEN24 3.0 – 6.0 Plus. For the Full Backup, additional external components for grid separation are required. You can find more information on this in the operating instructions.

BATTERY CONNECTION	PRIMO GEN24 4.6 PLUS	PRIMO GEN24 5.0 PLUS	PRIMO GEN24 6.0 PLUS
Number of DC connections		1	
Max. input current (I _{dc max})		22 A	
DC input voltage range (U _{dc min} - U _{dc max})		150 V - 455 V	
DC battery connection technology		1x BATT+ and 1x BATT- push-in spring terminals 2.5 - 10 mm ²	
Max. input / output power ²⁾	4,750 W	5,170 W	6,200 W
Max. AC charging power	4,600 W	5,000 W	6,000 W
Compatible batteries		BYD Battery-Box Premium HVS/HVM ³⁾	

FOR THE BATTERY CONNECTION A GEN24 PLUS IS NEEDED

²⁾ Depending on the connected battery

³⁾ Except HVS 10.2, HVS 12.8, HVM 8.3 and HVM 22.1

TECHNICAL DATA FRONIUS PRIMO GEN24 AND GEN24 PLUS (4.6, 5.0, 6.0)

GENERAL DATA	PRIMO GEN24 4.6 / GEN24 4.6 PLUS	PRIMO GEN24 5.0 / GEN24 5.0 PLUS	PRIMO GEN24 6.0 / GEN24 6.0 PLUS
Dimensions (height x width x depth)		530 x 474 x 165 mm	
Weight (inverter / with packaging)		15.4 / 19 kg	
Degree of protection		IP 66	
Protection class		1	
Nighttime power loss		< 10 W	
Overvoltage category (DC/AC) ⁴⁾		2 / 3	
Inverter design		Transformerless	
Cooling		Regulated air cooling	
Installation		Indoor and outdoor installation	
Ambient temperature range		-40 - +60 °C	
Permitted humidity		0 - 100 %	
Noise Emission		< 42 dB (A)	
Max. altitude		4,000 m	
DC PV connection technology		4x DC+ and 4x DC- push-in spring terminals 2.5 - 10 mm ²	
AC connection technology		3 pole AC push-in spring terminals 2.5 - 10 mm ² 3 pole backup power push-in spring terminals 1.5mm ² - 10mm ² 2x PE screw terminals 2.5 - 16 mm ² and 3x 2.5 – 10mm ²	
Certificates and compliance with standards		IEC 62109, IEC 62909, AS/NZS 4777.2, CEI 0-21, ABNT BNR 16149 and 16150, IEC 62116, IEC 61727 ⁵⁾	
Backup power functions		PV Point or Full Backup	

EFFICIENCY	PRIMO GEN24 4.6 / GEN24 4.6 PLUS	PRIMO GEN24 5.0 / GEN24 5.0 PLUS	PRIMO GEN24 6.0 / GEN24 6.0 PLUS
Max. efficiency		97.6 %	
Europ. efficiency (ηEU)	97.2 %	97.2 %	97.1 %
MPP-tracking efficiency		> 99.9 %	

PROTECTIVE DEVICES	PRIMO GEN24 4.6 / GEN24 4.6 PLUS	PRIMO GEN24 5.0 / GEN24 5.0 PLUS	PRIMO GEN24 6.0 / GEN24 6.0 PLUS
DC insulation measurement		Yes	
Overload behaviour		Operating point shift. Power limitation	
DC disconnect		Yes	
Reverse polarity protection		Yes	

INTERFACES	PRIMO GEN24 4.6 / GEN24 4.6 PLUS	PRIMO GEN24 5.0 / GEN24 5.0 PLUS	PRIMO GEN24 6.0 / GEN24 6.0 PLUS
WLAN / 2x Ethernet LAN		Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)	
6x digital in/out + 6x digital in		Interface to ripple control receiver, energy management	
USB 2.0 (A-socket)		1 A supply	
Emergency stop (WSD)		Yes	
Datalogger and Webserver		Included	
2x RS485		Modbus RTU SunSpec (third-party supplier) / Fronius Smart Meter, battery (GEN24), Fronius Ohmpilot	

⁴⁾ According to IEC 62109-1. Optional retrofit surge protection device DC SPD type 1+2 for 2 MPP trackers available under the following article number: 4,240,313,CK

⁵⁾ For the current certificates, please see www.fronius.com/primo-gen24-plus-cert

For further information on the availability of this inverter in your country please see www.fronius.com.