



**Battery  
Box**

# BATTERYBOX PREMIUM HVM



## KEY FEATURE



### Safety

- Self-developed LFP Battery
- Safety Proved by Millions of Electric Vehicles




### Reliability

- LFP R&D Started from 2002
- 1,000,000+ Systems in 90+ Countries



### High Performance

- High Efficiency Evaluated by HTW Berlin
- High-power Backup Function
- 100% Usable Capacity



### Flexibility

- Modular Design
- Expand Anytime



### Easy Installation

- Patented Internal Plug Connection
- Quick Commissioning



### Perfect Compatibility

- Compatible with Leading Single & Three Phase Inverter

## BATTERYBOX PREMIUM HVM



HVM 8.3



HVM 22.1




3 x HVM 22.1

Maximum capacity of

**66.2 kWh**

# TECHNICAL PARAMETERS PREMIUM HVM

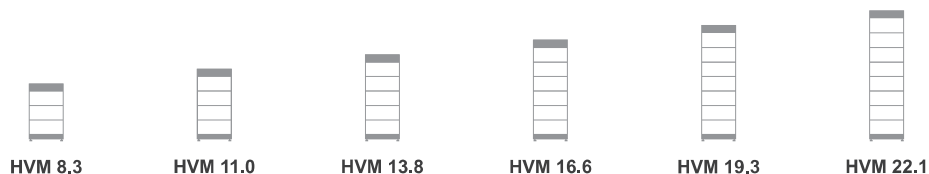

## PERFORMANCE

Battery Module <sup>[1]</sup>	HVM (2.76 kWh, 51.2 V, 35 / 38 kg)					
Number of Modules	3	4	5	6	7	8
Usable Energy <sup>[2]</sup>	8.28 kWh	11.04 kWh	13.80 kWh	16.56 kWh	19.32 kWh	22.08 kWh
Max Output Current <sup>[3]</sup>	50 A	50 A	50 A	50 A	50 A	50 A
Peak Output Current <sup>[3]</sup>	75 A, 3 s	75 A, 3 s	75 A, 3 s	75 A, 3 s	75 A, 3 s	75 A, 3 s
Nominal Voltage	153.6 V	204.8 V	256 V	307.2 V	358.4 V	409.6 V
Operating Voltage	120 - 177 V	160 - 236 V	200 - 295 V	240 - 354 V	280 - 413 V	320 - 472 V
Dimensions (H / W / D)	995 x 585 x 298 mm	1228 x 585 x 298 mm	1461 x 585 x 298 mm	1694 x 585 x 298 mm	1927 x 585 x 298 mm	2160 x 585 x 298 mm
Weight <sup>[4]</sup>	119 - 129 kg	153 - 167 kg	188 - 205 kg	222 - 243 kg	257 - 281 kg	291 - 319 kg

## GENERAL DATA

Operating Temperature	-10°C to +50°C
Battery Type	Lithium Iron Phosphate (LiFePO <sub>4</sub> )
Communication	CAN / RS485
Protection Rating	IP55
Round-trip Efficiency	≥ 96%
Environment	Indoor / Outdoor
Mounting Method	Floor Stand
Certification	VDE2510-50 / IEC62619 / CEC / CE / UN38.3
Applications	ON Grid / ON Grid + Backup / OFF Grid
Warranty <sup>[5]</sup>	10 Years
Compatible Inverters	

[1] HVM module has two versions with two types of cells applied separately. Both versions share the same performance, only weights differ.

[2] DC Usable Energy, test conditions: 100% DOD, 0.2C charge & discharge at + 25°C. System Usable Energy may vary with different inverter brands.

[3] Power derating will occur between -10°C and +5°C.

[4] Two versions of HVM module are adaptable with each other and can be stacked in one tower, The weights of the tower may vary with mixed HVM modules.

[5] Conditions apply. Refer to BYD Battery-Box Premium Limited Warranty Letter.